

TWISTER T4 PRO

High Cleanliness Environments

T4	Type	Feed (lbs/hr)	Feed (kg/hr)
1	Wet	Up to 23	Up to 11
2	Wet	Up to 52	Up to 24
3	Wet	Up to 78	Up to 36
1	Dry	Up to 7	Up to 3
2	Dry	Up to 16	Up to 7



WATCH IT IN ACTION 

TWISTERTRIMMER.COM/TWISTER-T4-TRIMMER



Triple System




Tandem System



T4 PRO Trimmer Features

- Food grade stainless steel bearings
- Double sealed bearing chamber
- Maintenance free bearings
- Welded stainless steel tumbler end caps
- High air flow guard
- 304 stainless steel tumbler to mitigate the risk of contamination
- Nitrided steel blades increase strength and resistance and decrease buildup
- Commercial dishwasher safe
- Direct high pressure washing

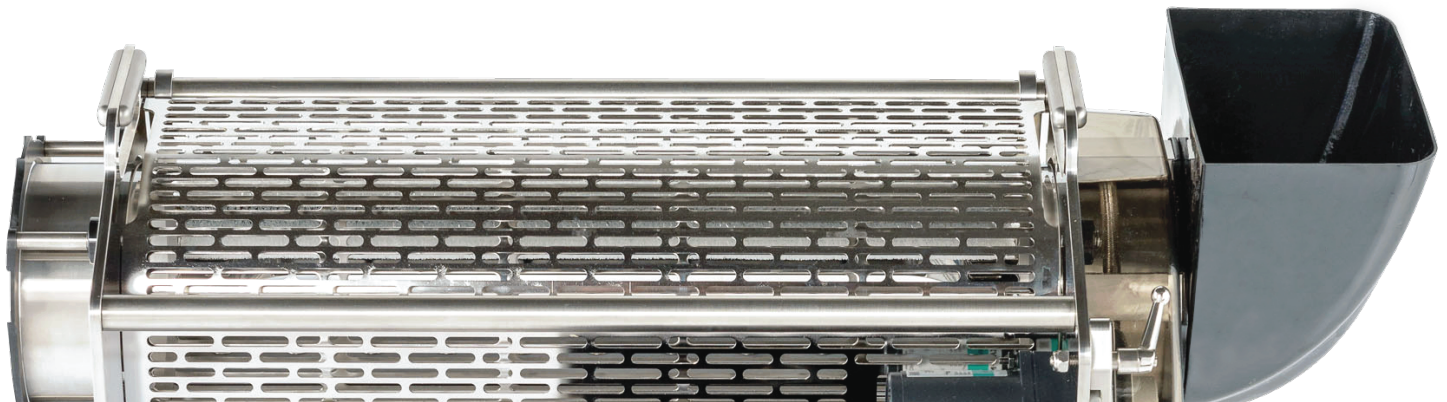

TWISTER T4 PRO



TESTED

ADDITIONAL REQUIREMENTS

Extension Cord

12 AWG (Minimum AWG Size)

7.6m / 25ft max length

T4 LEAF TRIMMER

T4 LEAF COLLECTOR

CONNECTOR (PLUG)

NEMA 5-15P



NEMA 5-15P



SPECIFICATIONS	Product Number	24-9027-00-P
	Input Voltage	115V, 60 Hz
	Current Draw	2A
	Blade Motor	200W
	Blade Speed	980-1875 RPM
	Tumbler Motor	6W
	Tumbler Speed	47-96 RPM
	Tumbler Diameter	5in / 10.1cm
	Tumbler Slots	40 x .25in/.6cm
	Cut Height	.040in / 1mm
	Weight	56lbs / 25.4kg
	Shipping Weight (w/ T4-LC)	120lbs / 54.4kg
	Length	25in / 63.5cm
	Width	15in / 38.1cm
	Height	16.5in / 42cm
Circuit Breaker Required	15A / 120V	
Connector (plug)	NEMA 5-15P	
Filter Bag Included	70 Micron	

ACCESSORIES & COMPONENTS	T4 Leaf Collector	23-0170-03-P
	T4 Trim Saver	23-0201-01-P
	T4 Stand (no vacuum)	23-0229-00
	T4 Stainless Steel Stand (no vacuum)	23-0030
	T4 Rail (Tandem)	24-0140-P
	T4 Rail (Triple)	24-0139-P
	Feed Conveyor (Inbound)	26-0001-02
	Quality Conveyor (Outbound)	26-0002-02
	Feed Conveyor (Extra Tall for T4 Rail)	26-0102-00

Visit twistertrimmer.com or call your Twister Rep for an extensive list of replacement parts or accessories.



TWISTER